

CE500A-BK/ CE500A-WH

Business Speaker

- Multi-purpose, 80-Watt, active speaker for commercial indoor installations (restaurants, shops, exhibitions), multimedia, home recording studio and audio/video production
- Exceptional sound quality, wide dynamic range and ultra-linear frequency range from 60 Hz to 23 kHz
- Powerful 5 ½" woofer with extremely light-weight cellulose cone and high-resolution ½" tweeter
- Integrated limiter for ultimate system control and speaker protection
- Ultra-low noise Mic/Line input with Volume control and peak LED
- Additional Line output connector allows linking of additional speaker systems
- Available in black (CE500A-BK) or white (CE500A-WH)
- Ultra-flexible wall-mount brackets included
- High-quality components and exceptionally rugged construction ensure long life
- Conceived and designed by BEHRINGER Germany

behringer.com

Loudspeakers

High-Performance, Active 80-Watt Business Environment Speaker System



For way too long, boardrooms, classrooms and restaurants around the world have had to put up with bad sound. You know, the kind generated by those flimsy “tin-cans-mounted-in-ceiling-tiles” (that no one seems to remember ever having installed in the first place). You can kiss “bad sound” goodbye forever thanks to the great-sounding new CE500A loudspeaker systems from BEHRINGER — and they’re available in your choice of black or white.

We Mean Business

The CE500A speaker system is ideal for business environments, letting you enjoy full, clear sound over a wide listening area. Specifically designed to complement commercial indoor facilities such as restaurants, shops, exhibition halls and more, CE500As come equipped with special

mounting brackets, allowing them to be mounted on walls or suspended from above. This means you can aim them, which is handy considering people have ears on the sides of their heads, not the top!

More Like Studio Monitors Than “Tin-Cans”

Inside these multi-purpose active loudspeakers are powerful 5 ½" woofers and high-resolution ½" tweeters powered by an internal 80-Watt amplifier. These transducers have been designed to work with the onboard amp seamlessly, meaning there is not too much, or even worse, too little wattage to adequately power the system. And the sound quality of the CE500A puts those aforementioned “tin-cans” to shame.

Continued on next page



CE500A-BK/ CE500A-WH

Business Speaker



Serious Connections


Connecting the CE500A couldn't be easier, thanks to the convenient rear panel which provides a standard XLR mic socket and RCA jacks for hooking up a tape/CD or even MP3 deck. To raise and lower the mic volume, just turn the Level control (RCA volume levels are controlled by the source device). To run two CE500As in stereo mode, connect your playback deck to the right RCA jack on one loudspeaker and the left jack on the other. You can even chain together as many CE500As as you'd like via the handy Link XLR socket.

Instant PA System


You don't even need a mixer to use the CE500A. You can plug one into the wall outlet, connect a microphone and start talking — sometimes that's all you need. That's why we include a special adapter that lets you mount

Continued on next page

Simple PA

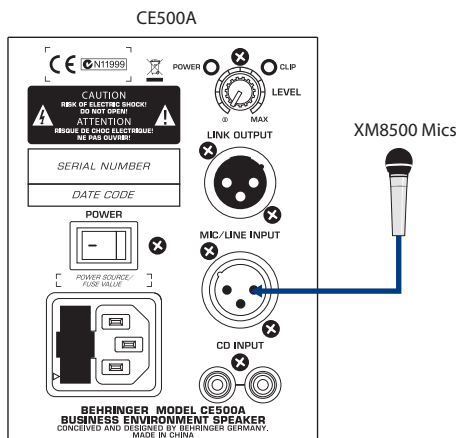


Linking multiple CE500As

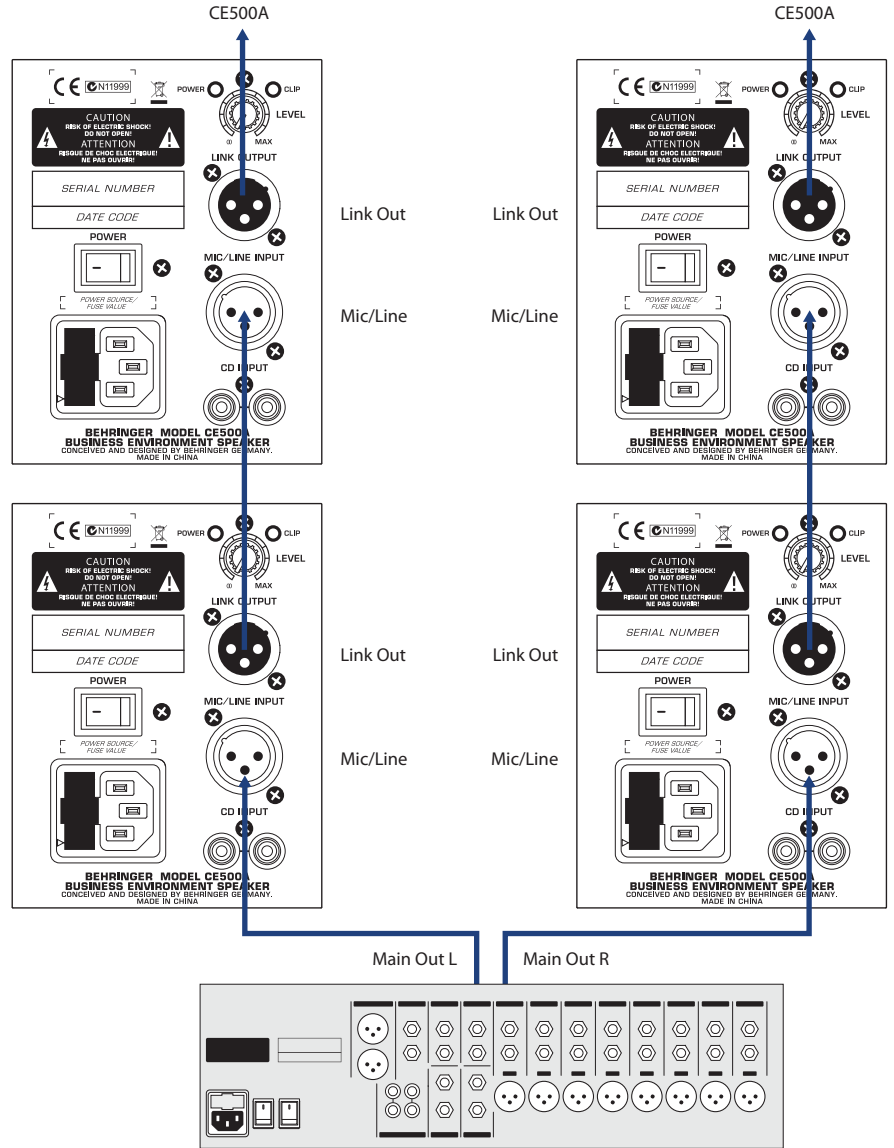

EURORACK PRO RX1202FX

Stereo Connection

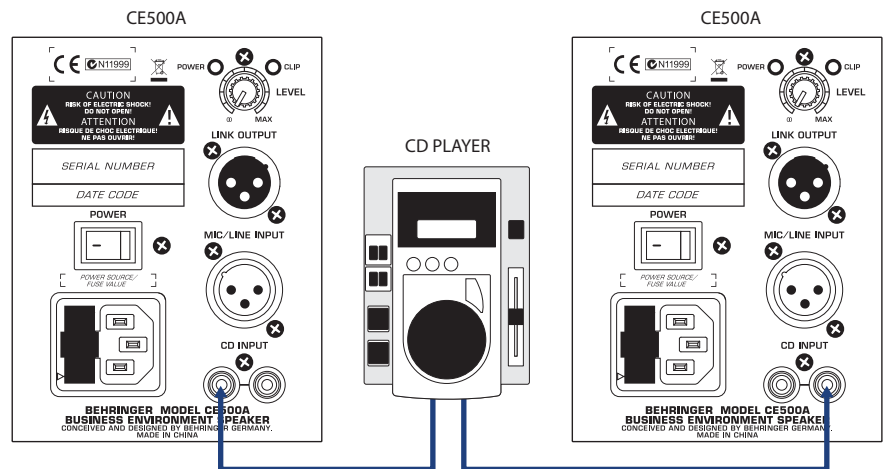

CE500A

CE500A

CE500A



CE500A-BK/ CE500A-WH

Business Speaker

the CE500A on a standard mic stand. It's like having your own personal 80-Watt megaphone!

Whether you need speakers for the conference room, the waiting room or the lobby, the new CE500A business

speakers will elevate your company status and get your message across. Stop yelling into those tin-cans... everyone will thank you.

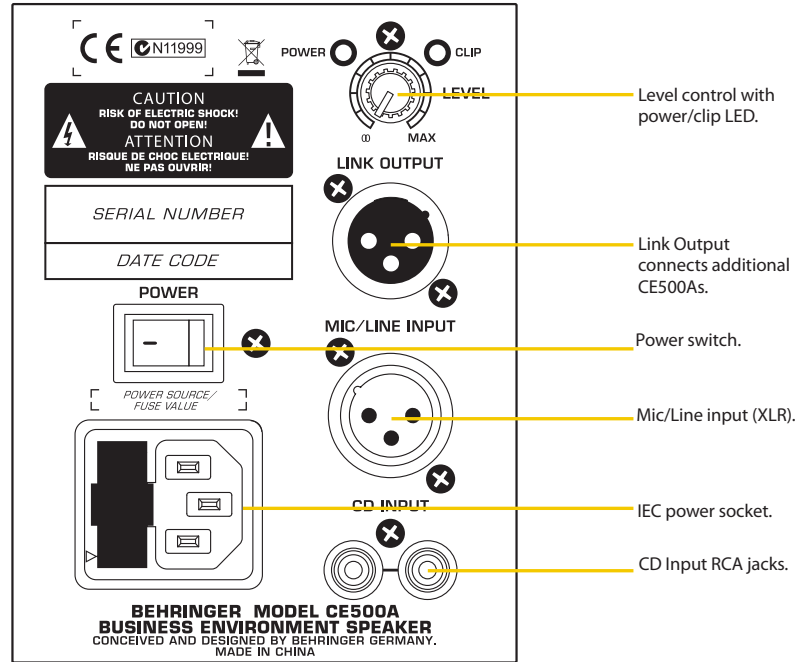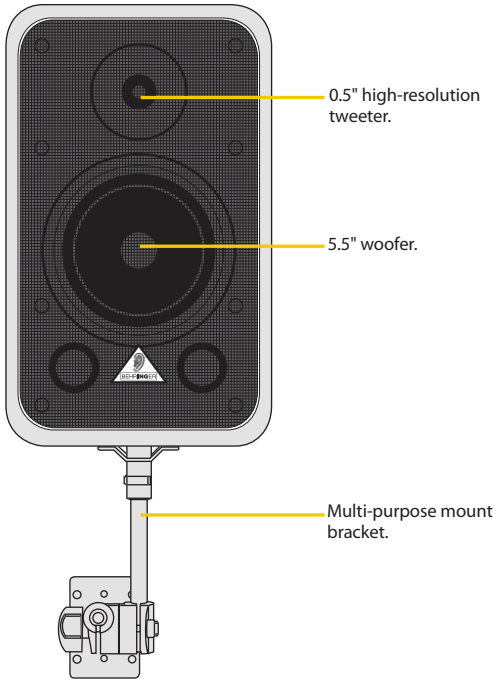

SPECIFICATIONS

Components

Tweeter	1/2"
Woofer	5 1/2"

Output Power

RMS @ 0.1 % THD	50 W
Peak Power	80 W

Audio Inputs

MIC/LINE	XLR, balanced
Input impedance	27 kOhm
Sensitivity	-40 dB to +10 dB
CD/TAPE RCA Input impedance	27 kOhm

Audio Output

LINK OUTPUT	XLR, balanced
-------------	---------------

System Data

Frequency range	60 Hz – 23 kHz (-10 dB)
Crossover frequency	5 kHz
Max. sound pressure level	112 dB
Limiters	optical

Power Supply

Power consumption	max. 150 W
Mains connector	IEC standard receptacle

Fuse

	100 - 120 V~: T 2.5 A H 250 V
	200 - 240 V~: T 1.5 A H 250 V

Dimensions/Weight

Dimensions (H x W x D)	12.5" x 7.7" x 7.8"
	318 mm x 195 mm x 197 mm
Weight	15 lbs.
	7 kg

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

For service, support or more information contact the BEHRINGER location nearest you:

BEHRINGER Australia tel.: +61 3 9877 7170, fax: +61 3 9877 7870 **BEHRINGER Germany** tel.: +49 2154 9206 4149, fax: +49 2154 9206 4199 **BEHRINGER Japan** tel.: +81 3 5281 1180, fax: +81 3 5281 1181 **BEHRINGER Singapore** tel.: +65 5845 1800, fax: +65 6214 0275 **BEHRINGER USA / CANADA** tel.: +1 425 672 0816, fax: +1 425 673 7647

behringer.com



©2009 BEHRINGER International GmbH. Technical specifications and appearance subject to change without notice. The information contained herein is correct at the time of printing. BEHRINGER accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein. All trademarks (except BEHRINGER, the BEHRINGER logo, JUST LISTEN and EURORACK) mentioned belong to their respective owners and are not affiliated with BEHRINGER. FOR INTERNAL USE BY BEHRINGER DEALERS ONLY. DO NOT DISTRIBUTE. 985-10000-00385